



**Digital PA AP-D412  
32 Channel Digital Alarm Matrix**




**AP-D412 32 Channel Digital Alarm Matrix**

**Features :**

- Integration of fire alarm system and public address system
- With support for up to 32 zones, any zone that has a fire alarm will force adjacent zones into an emergency situation warning personnel to evacuate
- Fire alarm signals are inputs to the unit's rear panel connector
- Alarm signal outputs are divided into two groups
- Rear panel address code switch is used to set the adjacent zone number, p to 9 adjacent zones
- Alarm Matrix can be monitored by OD-D400 through RS-485 interface
- 19" Ready rack mount Installation design

**APPLICATIONS**

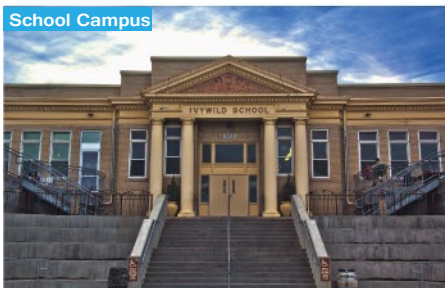

## Technical Specifications

<b>Model No.</b>	<b>AP-D412</b>
Input	32 channel alarm signals, ov
Output	32 channels divided into 2 groups of 16
Alarm Active out	OV short circuit signal
Adjacent Zones Range	0, +/-1, +/-2, +/-3, +/-4
Controls	Zone Selector, Address DIP Switch, Power
Indicators	CH1-CH32 alarm status, Power
Power Input	200-240V AC, Fuse Protection, 24V DC
Power Consumption	<15W
Mount	2U 19" Rack Mount, Table Top
Enclosure & Color	Full Metal, Black
Dimension & Weight	89(H) x 483(W) x 390(D) mm, <7Kg

