




SIP IP PA AP-S9SPM SIP PA Touch Based Paging Station

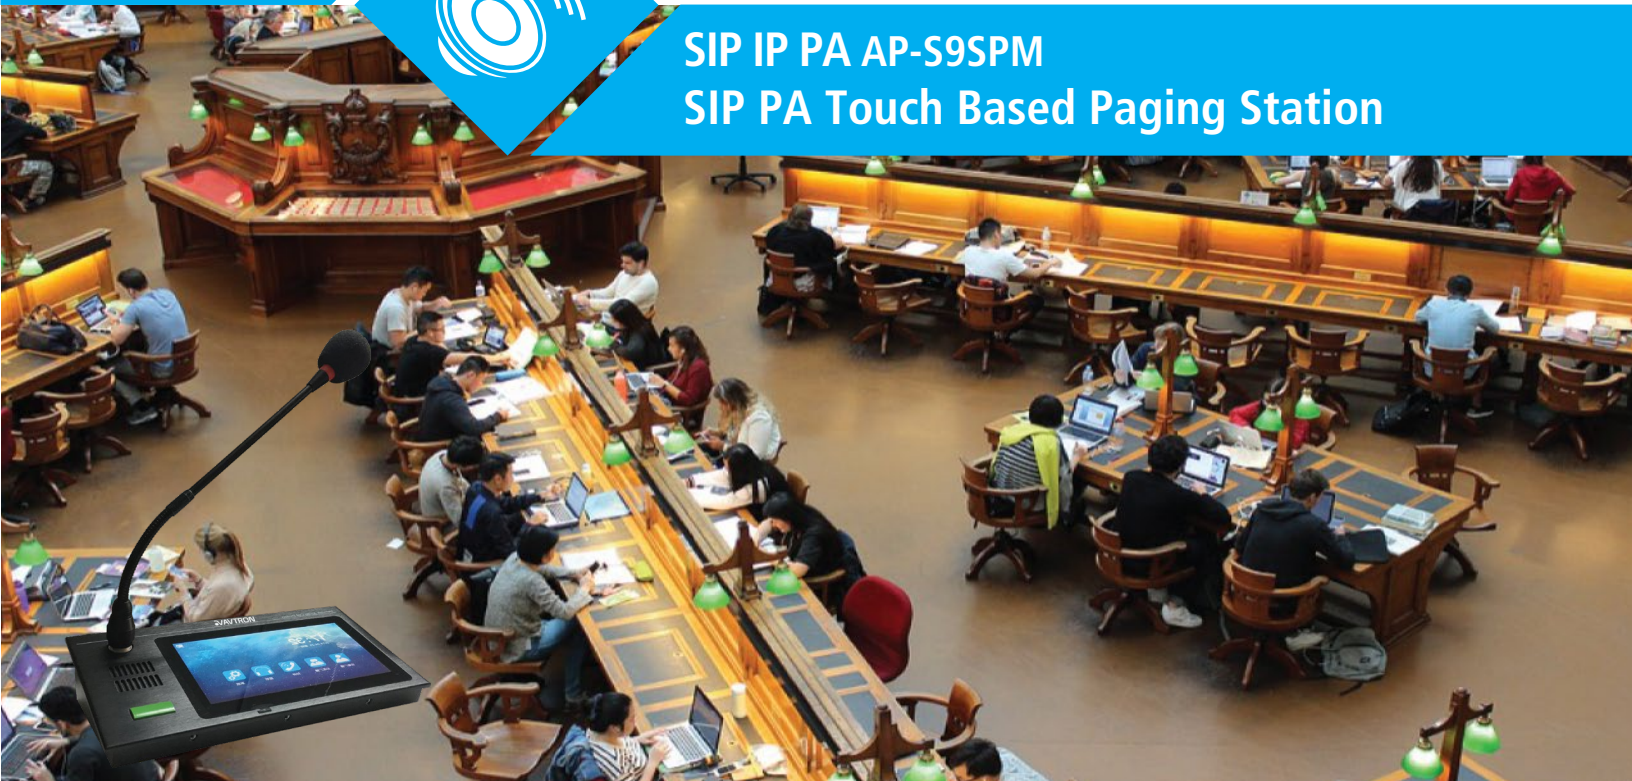

AP-S9SPM SIP PA Touch Based Paging Station

Features :

- SIP Desktop Calling Paging station for control and make announcement or intercom into all SIP PA system
- Can be announcement to individual speakers or group SIP speaker
- Built-in high speed industrial chip, start time less than 1 second
- Compatible with AVAYA, ALGATEL, CISCO, HUAWEI and many more SIP server softwares
- Online and Offline paging mode which ensure 24/7 paging facility
- Two way communication between field device to paging device
- Supports Line in and output, G.711 audio, Pre stored voice announcements
- Hands-free call and program broadcast receiving
- Built-in 7" LCD display easy to use
- Wide range protocol SIP/IP/ARP/IGMP/ICMP/DNS/DHCP/UDP
- Built-in microphone, 3W monitor speaker with clear voice and no echo noise
- External audio input, Audio output for external active speaker
- Dual power selectable 24V or 12V DC (before ordering, default 12V)
- Elegant and modern design with exquisite appearance

APPLICATIONS

Government & Corporates



Industries & Plants



Stations & Airports



Technical Specifications

| Model No. | AP-S9SPM |
|--------------------------|--|
| MIC | Gooseneck type(detachable) |
| Audio input | 1 Line in |
| Audio output | 1 Line out |
| Monitor speaker | Yes, 3W |
| Display screen | TFT 7" LCD |
| Network protocol | SIP, IP, ARP, IGMP, ICMP, DNS, DHCP, UDP |
| Network port | RJ-45(10/100Mbps) |
| Audio details | 8kHz~32kHz sampling, ADPCM encoding |
| Frequency response | 70Hz-12.5KHz |
| Power | DC Power |
| Power consumption | < 10 W |
| Working temp. & humidity | -0°C ~ 50°C, ≤ 90%RH (Not condensing) |
| Mount | Table top |
| Enclosure & Color | Full metal, Black |
| Dimension & Weight | 50(H) x 210(W) x 150(D) mm, <2Kg |

