



## IP Camera AM-DM2009-FMA1 H.265+ 2MP Super WDR ExIR IP Dome Camera



Superior Engineering Design & Sensational Image Quality

### AM-DM2009-FMA1 H.265+ 2MP Super WDR ExIR IP Dome Camera



H.265+ VIDEO COMPRESSION



SMART CODEC



SMART IR



3D NOISE REDUCTION




VOLTAGE PROTECTION  
4KV/2KV



12VDC/  
PoE 802.af

#### Super WDR

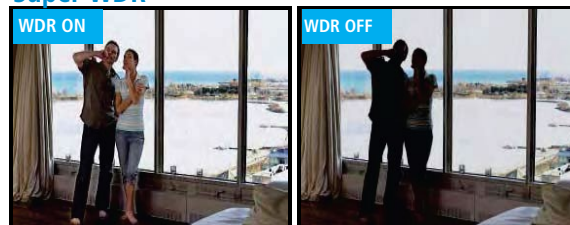

### Features :

- 1/2.9" progressive scan CMOS image sensor
- Powerful H.265+ Hardware compression along With H.264, MJPEG
- Full HD 2MP resolution with effective 1920(h) x 1080(v) pixel at 25/30fps
- Super 100dB WDR(Wide dynamic range) & 3D DNR(Digital noise reduction)
- Wide viewing angle 2.8MM high definition fixed focus lens
- High intensity ExIR LED up to 30Mtrs. night vision, TDN by dual filter(ICR)
- Low illumination at Color 0.05Lux, B&W 0.01Lux and 0Lux at IR On
- Smart IR function works when object/person is close to camera. It controls IR to get clear picture
- Software compatibility with icrys series 256Ch CMS software and any third party Onvif VMS/CMS Software
- P2P secure cloud monitoring on iOS/Android handsets(through NVR live/playback/audio and control)
- Built in uni/multicast streaming to support multiple users logging at same time
- Wide range network protocol TCP/UDP/FTP/RTSP/HTTP & many more
- Various modes for light compensation such BLC/HLC, AGC, Shutter speed
- Image enhancement by White balance, picture color, Day/Night mode & noise reduction
- OSD in multiple color, naming & position, Privacy, Motion detection
- ONVIF S profile, Email notification, Manual & Schedule snapshot, Manual recording
- Easy, fast response & friendly graphical user interface, Advanced encryption secure access
- Redundant power supported by 12VDC & PoE(power over ethernet) with 802.3af standard
- Built in TVS protection 4000V & lightning/surge Power(2000V), RJ45(1000V)
- In/Outdoor ceiling and wall mount supported IP66 waterproof metal dome enclosure

## Technical Specifications

Model No	AM-DM2009-FMA1
<b>Camera Specification</b>	
Sensor type	1/2.9" progressive scan CMOS sensor
Lux Level(illumination)	Color 0.05 Lux, B/W 0.01Lux @(F1.2, AGC ON), 0Lux @ IR On
Shutter speed	Auto/Manual, 1/2s ~ 1/100,000s
AGC	Yes
Lens	2.8MM fixed focus
IR distance	IR up to 30 Meter
IR function	Smart IR, ICR Dual Filter, IR LED power adjustable
<b>Compression/Video/Audio</b>	
Video compression	H.265+, H.265, H.264+, H.264, MJPEG
H.264/H.264+ Profile	Main, High, Baseline
Main stream	2MP 1920x1080/1.3MP 1280x960/ 1MP 1280x720
Second stream	704x576(D1), 704x288(2CIF), 352x288(CIF), 640x360
Record & Live frame rate	Selectable 1 ~ 25 fps at 4MP, 3MP, 2MP, 1.3MP, 1MP at on Main, Second stream @ 15fps
Bitrate control	32Kbps ~ 6Mbps, VBR, CBR, I-Frame interval
<b>Smart Functions</b>	
Intelligent alarm	Advanced motion detection, Recognize only persons from all the moving objects
Intelligent codec	256kbps for 1080P video stream, 1GB storage for 24 hours recording
Intelligent image	Advanced algorithm, Identifies persons clearly
<b>Camera Functions</b>	
WDR	100dB, Auto/Manual adjustable
Day/Night	Auto(Outside/Inside), Color, B/W
Digital noise reduction	3DNR (Close/Ordinary/Expert)
Light compensation	BLC Off/On, 1 area, Customize design, HLC Off/On adjustable
White balance	Auto/Manual/Lock/Nature/Sunshine/Day Light/Warm light
Other functions	Smart defog control, EIS(Image Stabilizer), Flip control, Motion detection, Privacy masking
Image control	Brightness, Contrast, Sharpness, Saturation
OSD display	16x16,32x32,24x24,48x48,64x64 character size 5 area arrangement @ Time/Date/Week/Character/PTZ angle
Alarm alert	On-screen alerts/Link out/FTP upload, PTZ trigger/E-MAIL/Pre-Post record(through NVR)
<b>Network, Storage, Interface</b>	
Protocol	TCP/UDP/HTTP/802.1x/FTP/UPnP/Multicast/DNS/DDNS/NTP/RTSP/DHCP/PPPoE
Pre & Post recording	Pre : 5 to 15sec, Post : 10 to 60 sec
Network storage	FTP(pre & post upload)
LAN port	1x Port RJ-45, 10M/100M ethernet
<b>Software Support</b>	
Onvif	Yes, Profile S
CMS software	iCRY5 series, up to 256CH(IP+NVR+Matrix)
3rd Party VMS/NVR /CMS	Onvif/SDK
Mobile	Cloud support Android /iOS through NVR
User login	8 User / 4 level of rights, Simultaneous login ≤7 user client
Snap shot management	Schedule, Link with FTP or Email
Encryption	Off/AES

## Technical Specifications

Model No.	AM-DM2009-FMA1
<b>General</b>	
Power supply	DC 12V ±15% & PoE (802.3af)
Power consumption	<3W @ IR Off, <6W @ IR ON
Voltage protection	TVS 6000V, Lightning/Surge 2000V(power) 1000V(RJ45)
IP & Vandal protection	IP66
Reset switch	N.A
Operating temp. & humidity	-30°C ~ 60°C & 0% ~ 95% RH
Enclosure	3 Axis rotation dome, Metal dome
Weight (g) & Dimension	<0.4KG camera, Ø 116mm(D) X 98mm(H)

### Dimension :

