



## IP Camera AM-UM5009-FMA1 H.265+ 0.002lux 5MP True WDR IP Dome Camera



**DARK WARRIOR**  
STAR LIGHT

### Dark Warrior Starlight Series IP Camera

Designed to work under Ultra Low Light illumination to Give Colour Picture Quality

Superior Engineering Design & Sensational Image Quality

## AM-UM5009-FMA1 H.265+ 0.002lux 2MP True WDR IP Dome Camera



H.265+ VIDEO  
COMPRESSION



SMART  
CODEC



SMART  
IR



3D  
NOISE  
REDUCTION




VOLTAGE  
PROTECTION



12VDC/  
PoE 802.af  
POWER

### Super WDR

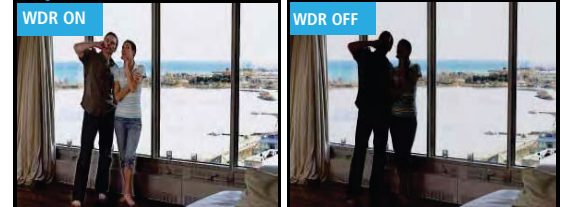

### Features :

- 1/2.8" Ultra low lux progressive scan CMOS sensor
- Powerful H.265+ Hardware compression along With H.264, MJPEG
- UltraHD 5MP Resolution 1944P at 18FPS, Real-time 30/25fps at 4MP, 3MP, 2MP, etc.
- Ultra low lux color image at 0.002Lux, B&W 0.001Lux and 0Lux at IR On
- True 120dB WDR(Wide dynamic range) & 3D DNR(Digital noise reduction)
- Wide viewing angle 2.8MM high definition fixed focus lens
- Triple compression, Dual streaming, Variable/Constant bitrate and frame rate
- High intensity ExIR LED up to 30Mtrs. night vision, TDN by dual filter(ICR)
- Smart IR function works when object/person is close to camera. It controls IR to get clear picture
- Software compatibility with icrys series 256Ch CMS software and any third party Onvif VMS/CMS Software
- P2P secure cloud monitoring on iOS/Android handsets(through NVR live/playback/audio and control)
- Built in uni/multicast streaming to support multiple users logging at same time
- Wide range network protocol TCP/UDP/FTP/RTSP/HTTP & many more
- Various modes for light compensation such BLC/HLC, AGC, Shutter speed
- Image enhancement by White balance, picture color, Day/Night mode & noise reduction
- OSD in multiple color, naming & position, Privacy, Motion detection
- ONVIF S profile, Email notification, Manual & Schedule snapshot, Manual recording
- Easy, fast response & friendly graphical user interface, Advanced encryption secure access
- Redundant power supported by 12VDC & PoE(power over ethernet) with 802.3af standard
- Built in TVS protection 4000V and lightning/surge protection Power(2000V), RJ45(1000V)
- In/Outdoor ceiling and wall mount supported IP66 waterproof metal dome enclosure

### Darkwarrior Starlight IP Camera Night Vision



## Technical Specifications

Model No	AM-UM5009-FMA1
<b>Camera Specification</b>	
Sensor type	1/2.8" Ultra low lux Exmor CMOS sensor
Lux Level(illumination)	Color 0.002Lux, B/W 0.001Lux, 0Lux at IR On
Shutter speed	Auto/Manual, 1/2s ~ 1/100,000s
AGC	Yes
Lens	2.8MM fixed focus
IR distance	IR up to 30 Meter
IR function	Smart IR, ICR Dual Filter, IR LED power adjustable
<b>Compression/Video/Audio</b>	
Video compression	H.265+, H.265, H.264+, H.264, MJPEG
Video resolution	5MP(1944P,1920P), 4MP(1520P)/3MP/2MP/1.3MP/1MP/D1/2CIF/CIF/VGA
Main stream	5MP 2592×1944, 2560×1920, 4MP(2560x1520)/1080P(1920x1080)/960P(1280x960)/720P(1280x720)/D1(704x576)
Second stream	D1(704*576)/2CIF(704x288)/CIF(352x288)/QCIF(172x144)
Record & Live frame rate	Selectable 18/20fps at 5MP, 25fps at 4MP/3MP/2MP/1.3MP/1MP, second stream
Bitrate control	32Kbps ~ 8Mbps, VBR, CBR, I-Frame interval
<b>Smart Functions</b>	
Intelligent alarm	Advanced motion detection, Recognize only persons from all the moving objects
Intelligent codec	256kbps for 1080P video stream, 1GB storage for 24 hours recording
Intelligent image	Advanced algorithm, Identifies persons clearly
<b>Camera Functions</b>	
WDR	120dB, Auto/Manual adjustable
Day/Night	Auto(Outside/Inside), Color, B/W
Digital noise reduction	3DNR (Close/Ordinary/Expert)
Light compensation	BLC Off/On, 1 area, Customize design, HLC Off/On adjustable
White balance	Auto/Manual/Lock/Nature/Sunshine/Day Light/Warm light
Other functions	Smart defog control, EIS(Image Stabilizer), Flip control, Motion detection, Privacy masking
Image control	Brightness, Contrast, Sharpness, Saturation
OSD display	Yes, Character size, Display arrangement, Color
Alarm alert	On-screen alerts/Link out/FTP upload, PTZ trigger/E-MAIL/Pre-Post record(through NVR)
<b>Network, Storage, Interface</b>	
Protocol	TCP/UDP/HTTP/802.1x/FTP/UPnP/Multicast/DNS/DDNS/NTP/RTSP/DHCP/PPPoE
Pre & Post recording	Pre : 5 to 15sec, Post : 10 to 60 sec
Network storage	FTP(pre & post upload)
LAN port	1x port RJ-45, 10M/100M ethernet
<b>Software Support</b>	
Onvif	Yes, Profile S
CMS software	iCRYS series, up to 256CH(IP+NVR+Matrix)
3rd Party VMS/NVR /CMS	Onvif/SDK
Mobile	Cloud support Android /iOS through NVR
User login	8 User / 4 level of rights, Simultaneous login ≤7 user client
Snap shot management	Schedule, Link with FTP or Email
Encryption	Off/AES

## Technical Specifications

Model No.	AM-UM5009-FMA1
<b>General</b>	
Power supply	DC 12V ±15% & PoE (802.3af)
Power consumption	<3W @ IR Off, <6W @ IR ON
Voltage protection	TVS 6000V, Lightning/Surge 2000V(power) 1000V(RJ45)
IP & Vandal protection	IP66
Reset switch	N.A
Operating temp. & humidity	-30°C ~ 60°C & 0% ~ 95% RH
Enclosure	3 Axis rotation dome, Metal dome
Weight (g) & Dimension	<0.4KG camera, Ø 116mm(D) X 98mm(H)

### Dimension :

