



## EVAC/PAVA System AP-D12ZS Zone Expansion Station



## AP-D12ZS Zone Expansion Station

### Features :

- Built-In 12 Zone remote paging microphone
- Max. supported 32 remote microphones in Loop connection
- Max Expandable up to 120 zones
- 12 Zone selection, LED Indicator for Activated zone
- All zone call, Individual Call buttons
- Two RJ45 Ports Input and Expansion Output
- Fault monitoring by LED and Buzzer

### APPLICATIONS


Mall & Residential Apartments



Hotels & Hospital



Call Center/IT Parks

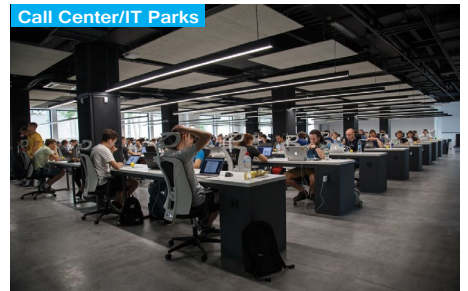

## Technical Specifications

Model No.	AP-D12ZSS
MIC	Gooseneck type
Built-In Zone Capa.	12 Zones
Expansion Capa.	11 Remote MIC
S/N Ratio	≥70dB
THD	<1%, 1KHz
Frequency Response	80Hz ~ 16KHz
Power Input	DC 5V
Power Consumption	<3W
Working Temp. & Humidity	-20°C ~ 70°C, ≤ 95%RH (Not condensing)
Mount	Table Top
Enclosure & Color	Full Metal, Black
Dimension & Weight	150(H) x 260(W) x 55(D) mm, <1.5Kg

